



Чертежи мотор-вариаторов серии МК

МК 2 - МК 100


МК...B5

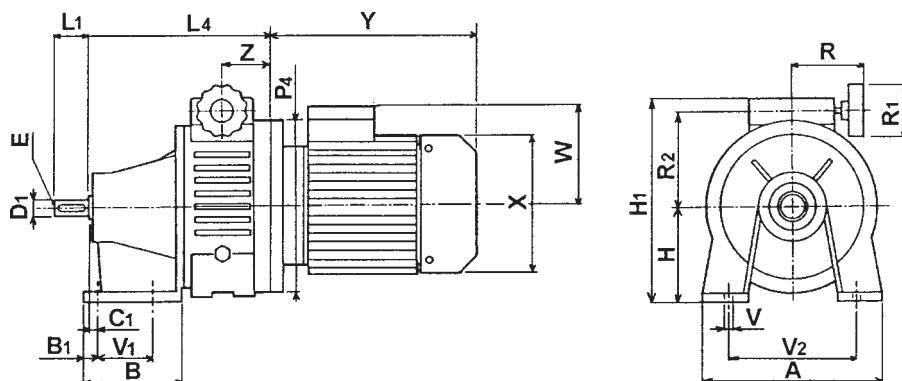

**МК...
PAM B14**

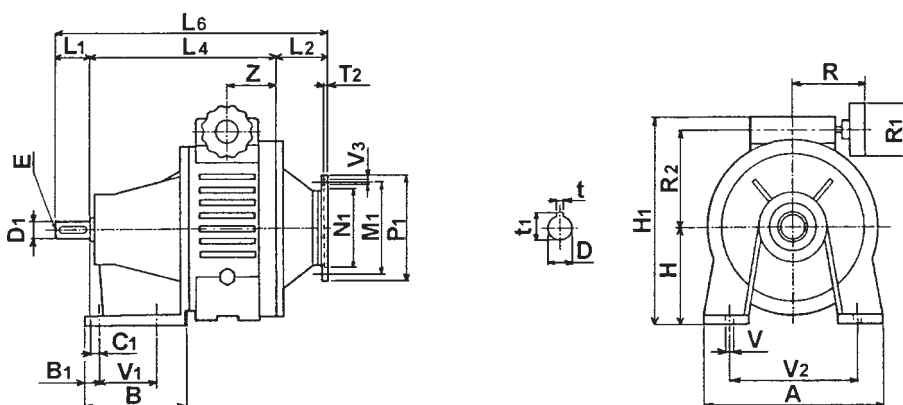

K...

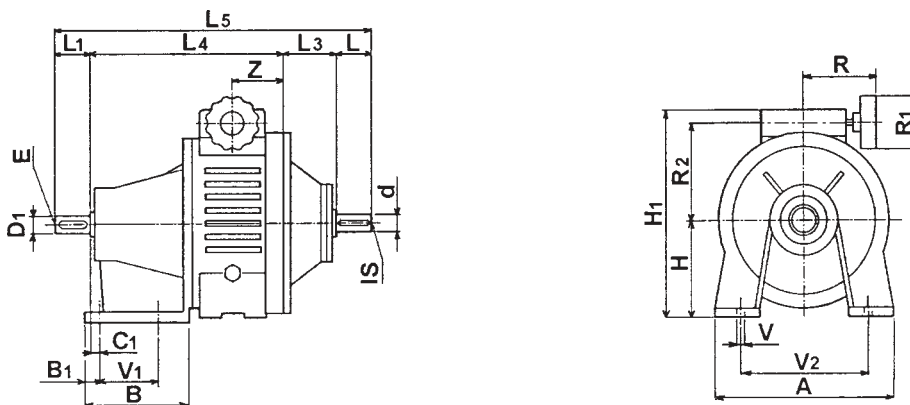

	V	V ₁	V ₂	H	H ₁	L ₂	L ₃	L ₄	L ₅	L ₆	M ₁	N ₁	P ₄	R	R ₁	R ₂	T ₂	V ₃	Z	d _{j6}	IS	L	D _{j6}	E	L ₁	D _{F7}	t	t ₁	P ₁
2	9,5	25	95	70	166	60	59	148	260 253	238 231	115	95	140	110	85	75	4	9,5	48	11	M4	23	14 11	M5 M4	30 23	11	4	12,8	90
5	9,5	55	150	85	190	60	58	186	315 305	286 276	130	110	180	110	85	88	4	9,5	55	14	M5	30	19 14	M8 M5	40 30	14	5	16,3	105
10	12	65	165	110	235	65	63	225	378 368	340 330	165	130	200	130	110	106	5	11,5	72	19	M8	40	24 19	M8	50 40	19	6	21,8	120
20	14	75	185	125	275	77	76	250	436 426	387 377	165	130	200	138	110	125	5	11,5	70	24	M8	50	28 24	M8	60 50	24	8	27,3	140
30 50	14	85	240	150	325	90	97	293	530 510	463 443	215	180	250	158	110	160	5	14	87	28	M8	60	38 28	M10 M8	80 60	28	8	31,3	160
100	18	120	295	190	425	120	120	348	653 623	573 543	265	230	300	195	110	206	5	14	110	38	M10	80	42 38	M10	110 80	38	10	41,3	-