


DATI TECNICI / TECHNICAL DATA / TECHNISCHE DATEN
CARACTÉRISTIQUES TECHNIQUES / DATOS TÉCNICOS / CARACTERÍSTICAS TÉCNICAS


CV RCV	i	n ₁ = 2800 min ⁻¹			n ₁ = 1400 min ⁻¹			n ₁ = 900 min ⁻¹					
		n ₂ min ⁻¹	Mn ₂ Nm	P ₁ kW	n ₂ min ⁻¹	Mn ₂ Nm	P ₁ kW	n ₂ min ⁻¹	Mn ₂ Nm	P ₁ kW	IEC B5	IEC B14	NEMA
281	1.14	2456	33	8.7	1228	40	5.2	789	40	3.4	71-80-90-100-112-132	100-112-132	140-180
	1.56	1795	39	7.5	897	47	4.5	577	47	2.9	71-80-90-100-112-132	100-112-132	140-180
	2.29	1223	51	6.7	611	61	4.0	393	61	2.6	71-80-90-100-112	100-112	140-180
	2.83	989	60	6.3	495	72	3.8	318	72	2.4	71-80-90-100-112	100-112	140-180
	3.38	828	60	5.3	414	72	3.2	266	72	2.0	71-80-90-100-112	100-112	140-180
	3.84	729	60	4.7	365	72	2.8	234	72	1.8	71-80-90-100-112	100-112	140-180
	4.41	635	61	4.1	317	73	2.5	204	73	1.6	71-80-90-100-112	100-112	140-180
	5.57	503	68	3.7	251	82	2.2	162	82	1.4	71-80-90-100-112	100-112	140-180
	7.36	380	90	3.7	190	108	2.2	122	108	1.4	71-80-90-100-112	100-112	140-180

DIMENSIONI / DIMENSIONS / ABMESSUNGEN / DIMENSIONS / DIMENSIONES / DIMENSÕES

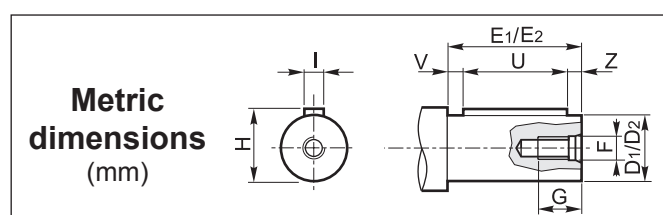


① Albergo entrata / Input shaft / Antriebswelle Arbre d'entrée / Eje de entrada / Eixo de entrada								
D ₁ h6	E ₁	F	G	H	I	U	V	Z
24	50	M8	18	27	8	40	5	5

② Albergo uscita / Output shaft / Abtriebswelle Arbre de sortie / Eje de salida / Eixo de saída								
D ₂ h6	E ₂	F	G	H	I	U	V	Z
24	50	M8	18	27	8	40	5	5
25	50	M8	18	28	8	40	5	5
28	60	M8	18	31	8	50	5	5
30	60	M10	22	33	8	50	5	5
32	80	M10	22	35	10	70	5	5

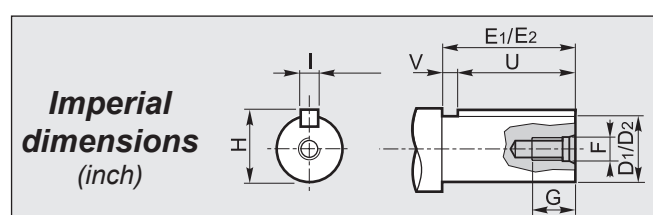

① Albergo entrata / Input shaft / Antriebswelle Arbre d'entrée / Eje de entrada / Eixo de entrada							
D ₁	E ₁	F	G	H	I	U	V
1.000	1.969	5/16-16	0.709	1.109	0.250	1.500	0.469

② Albergo uscita / Output shaft / Abtriebswelle Arbre de sortie / Eje de salida / Eixo de saída							
D ₂	E ₂	F	G	H	I	U	V
1.125	2.362	3/8-16	0.906	1.236	0.25	1.750	0.612



A richiesta / On request / Auf Anfrage / Sur demande / Bajo demanda / Sob consulta