
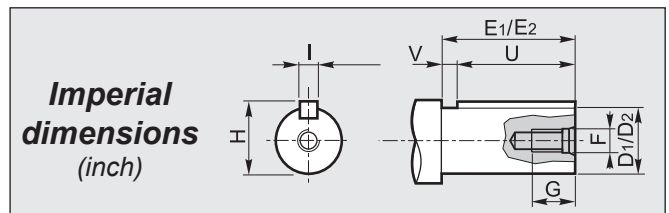
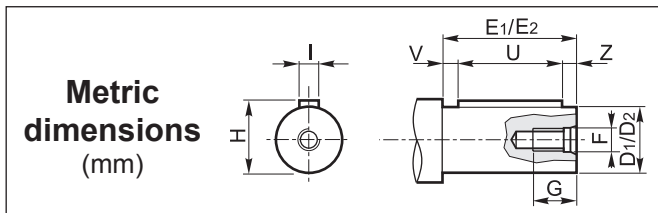


DATI TECNICI / TECHNICAL DATA / TECHNISCHE DATEN
 CARACTÉRISTIQUES TECHNIQUES / DATOS TÉCNICOS / CARACTERÍSTICAS TÉCNICAS

CV RCV	i	n ₁ = 2800 min ⁻¹			n ₁ = 1400 min ⁻¹			n ₁ = 900 min ⁻¹					
		n ₂ min ⁻¹	Mn ₂ Nm	P ₁ kW	n ₂ min ⁻¹	Mn ₂ Nm	P ₁ kW	n ₂ min ⁻¹	Mn ₂ Nm	P ₁ kW	IEC B5	IEC B14	NEMA
202A	3.81	735	44	3.5	367	52	2.1	236	52	1.3	56-63-71-80-90	56-63-71-80-90	56-140
	4.66	601	51	3.3	300	61	2.0	193	61	1.3	56-63-71-80-90	56-63-71-80-90	56-140
	5.49	510	61	3.4	255	73	2	164	73	1.3	56-63-71-80-90	56-63-71-80-90	56-140
	6.46	433	59	2.8	217	70	1.7	139	70	1.1	56-63-71-80-90	56-63-71-80-90	56-140
	7.75	361	60	2.4	181	72	1.4	116	73	0.92	56-63-71-80-90	56-63-71-80-90	56-140
	8.57	327	61	2.2	163	73	1.3	105	73	0.84	56-63-71-80-90	56-63-71-80-90	56-140
	9.92	282	64	2	141	77	1.2	91	77	0.76	56-63-71-80-90	56-63-71-80-90	56-140
	11.67	240	65	1.7	120	78	1	77	78	0.66	56-63-71-80-90	56-63-71-80-90	56-140
	14	200	65	1.4	100	78	0.85	64	78	0.55	56-63-71-80-90	56-63-71-80-90	56-140
	15.48	181	65	1.3	90	78	0.77	58	78	0.49	56-63-71-80-90	56-63-71-80-90	56-140
	18.01	155	81	1.4	78	97	0.82	50	97	0.53	56-63-71-80-90	56-63-71-80-90	56-140
	21.19	132	80	1.2	66	96	0.69	42.5	96	0.44	56-63-71-80-90	56-63-71-80-90	56-140
	25.43	110	88	1.1	55	106	0.64	35.4	106	0.41	56-63-71-80-90	56-63-71-80-90	56-140
	28.13	100	86	0.93	50	103	0.56	32	103	0.36	56-63-71-80-90	56-63-71-80-90	56-140
	31.71	88	89	0.86	44.2	108	0.52	28.4	107	0.33	56-63-71-80-90	56-63-71-80-90	56-140
	37.31	75	90	0.74	37.5	107	0.44	24.1	107	0.28	56-63-71-80-90	56-63-71-80-90	56-140
	44.77	63	89	0.61	31.3	107	0.36	20.1	107	0.23	56-63-71-80-90	56-63-71-80-90	56-140
	49.52	57	87	0.54	28.3	104	0.32	18.2	104	0.21	56-63-71-80-90	56-63-71-80-90	56-140
	54.2	52	86	0.48	25.8	103	0.29	16.6	103	0.19	56-63-71-80-90	56-63-71-80-90	56-140
	60.43	46.3	75	0.38	23.2	90	0.23	14.9	90	0.15	56-63-71-80-90	56-63-71-80-90	56-140

DIMENSIONI / DIMENSIONS / ABMESSUNGEN / DIMENSIONS / DIMENSIONES / DIMENSÕES



① **Albero entrata / Input shaft / Antriebswelle**
Arbre d'entrée / Eje de entrada / Eixo de entrada

D ₁ h6	E ₁	F	G	H	I	U	V	Z
(16)*	40	M6	15	18	5	25	10	5
19	40	M6	15	21.5	6	30	5	5

① **Albero entrata / Input shaft / Antriebswelle**
Arbre d'entrée / Eje de entrada / Eixo de entrada


D ₁	E ₁	F	G	H	I	U	V
0.750	1.575	5/16-18	0.709	0.832	0.187	1.000	0.575

② **Albero uscita / Output shaft / Abtriebswelle**
Arbre de sortie / Eje de salida / Eixo de saída

D ₂ h6	E ₂	F	G	H	I	U	V	Z
14	30	M5	12	16	5	20	5	5
16	40	M6	16	18	5	30	5	5
19	40	M6	16	21.5	6	30	5	5
20	40	M8	18	22.5	6	30	5	5
24	40	M8	18	27	8	30	5	5
25	50	M8	18	28	8	40	5	5
28	60	M8	18	31	8	50	5	5
30	60	M10	22	33	8	50	5	5

② **Albero uscita / Output shaft / Abtriebswelle**
Arbre de sortie / Eje de salida / Eixo de saída

D ₂	E ₂	F	G	H	I	U	V
0.750	1.575	5/16-18	0.708	0.832	0.187	1.000	0.575



A richiesta / On request / Auf Anfrage / Sur demande / Bajo demanda / Sob consulta